


DC Air Cooled configurations



429 mm
Base
424 mm


Configuration:
Height:
Max. DC Amps:
IP:
Weight:

Q100

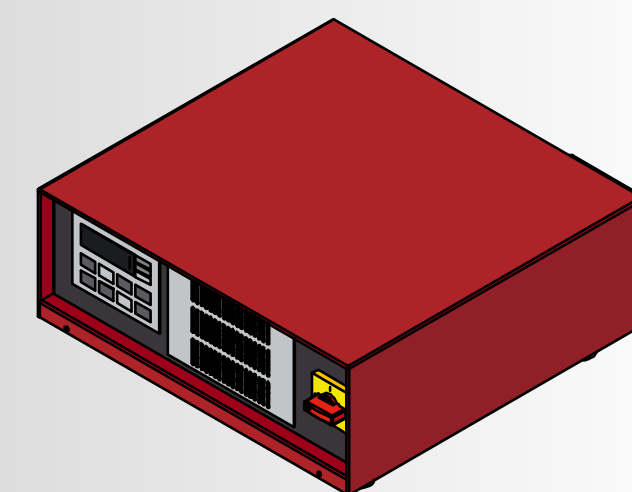


01 (mini)	
154 mm	
500 A	
IP31	
25 kg	

Q300

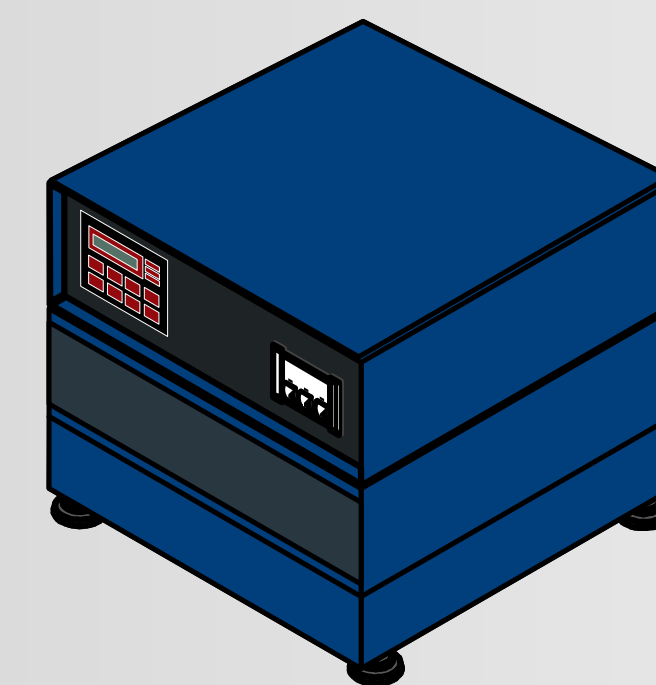

01-1	
369 mm	
550 A	
IP21	
45 kg	

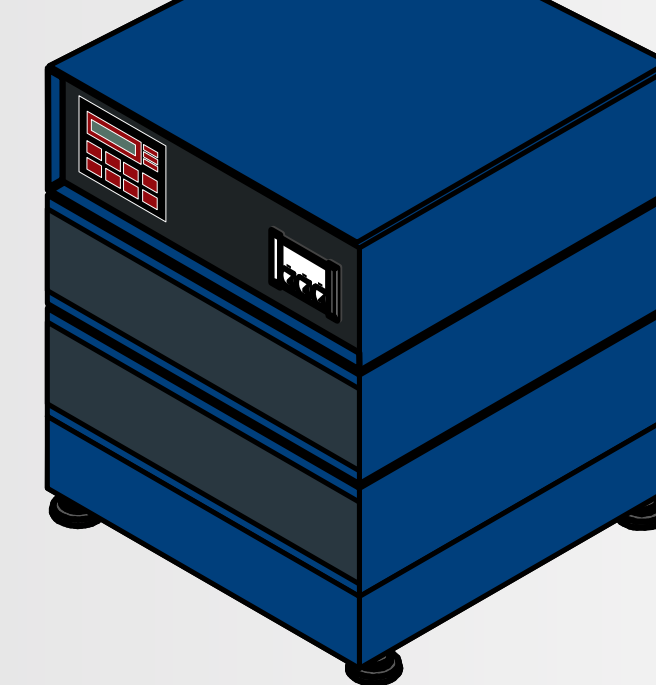


02-2	
501 mm	
1100 A	
IP21	
69 kg	




03-3	
633 mm	
1700 A	
IP21	
89 kg	

Q500

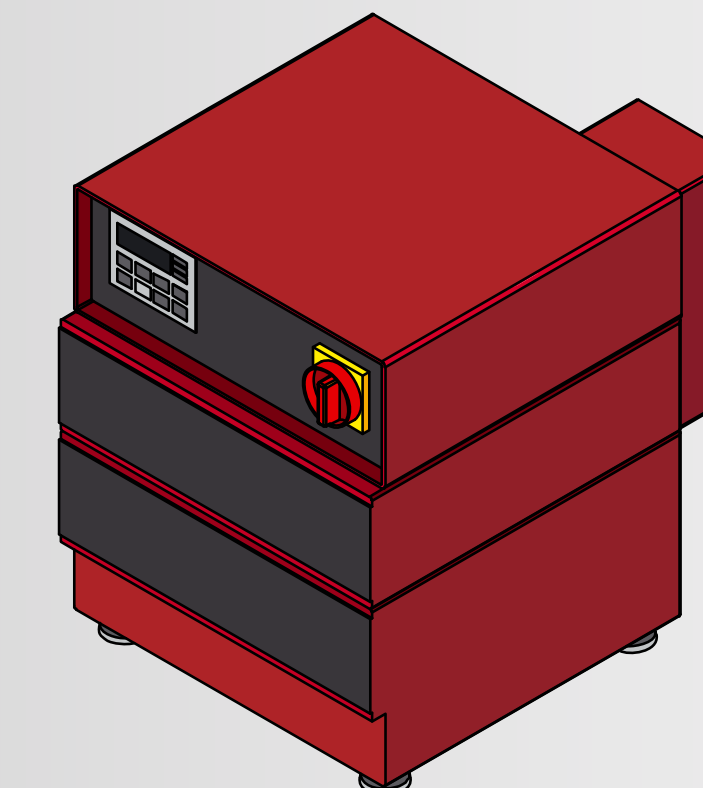

02-i1	
551 mm	
550 A	
IP32	
79 kg	

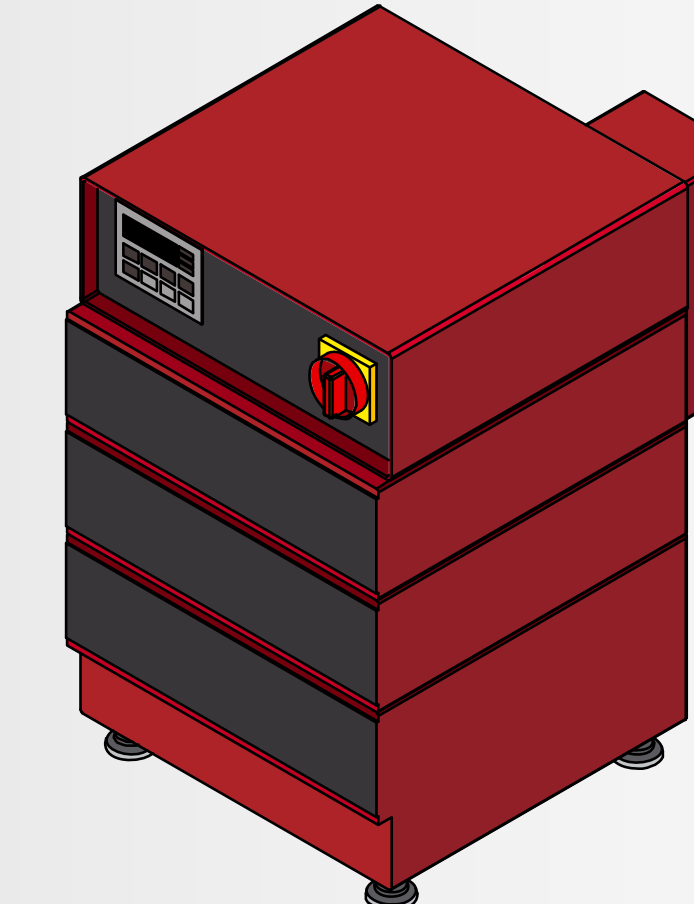

03-1i1	
683 mm	
1100 A	
IP32	
99 kg	



04-1i2	
815 mm	
1700 A	
IP32	
119 kg	


429 mm
Base
424 mm

Configuration:
Height:
Max. DC Amps:
IP:
Weight:


Q500




05-2i2	
947 mm	
2200 A	
IP32	
139 kg	

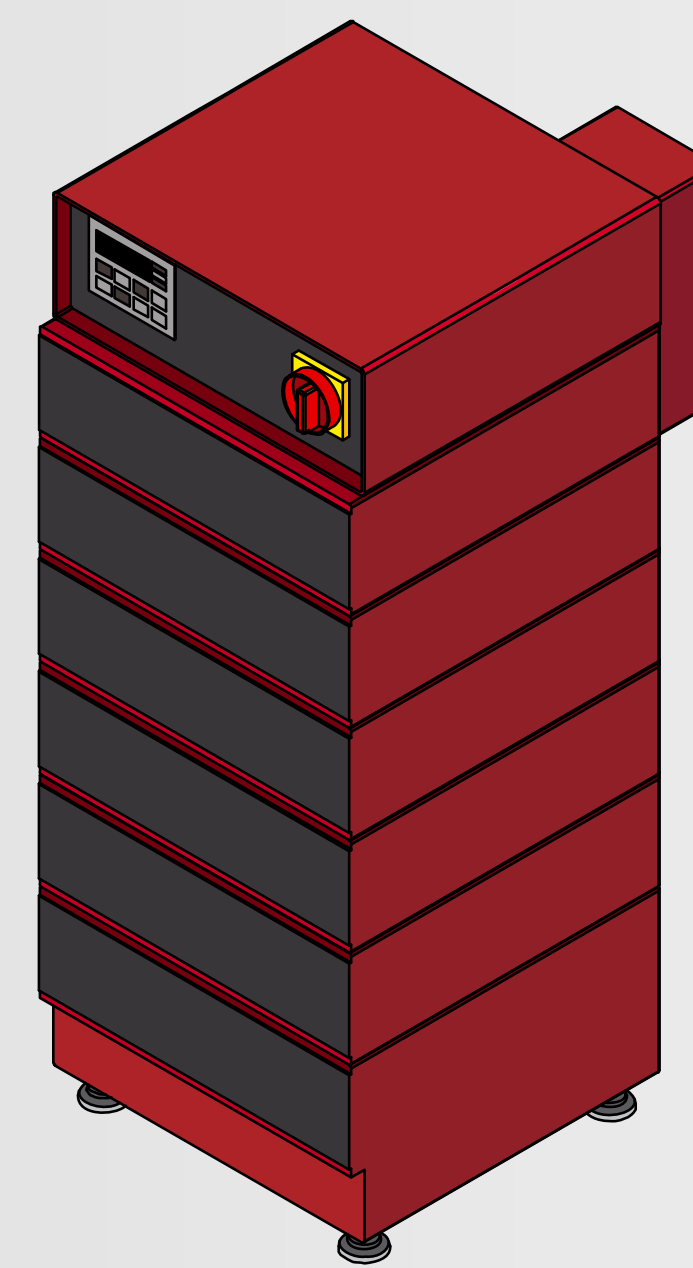


06-2i3	
1079 mm	
2000 A	
IP32	
159 kg	

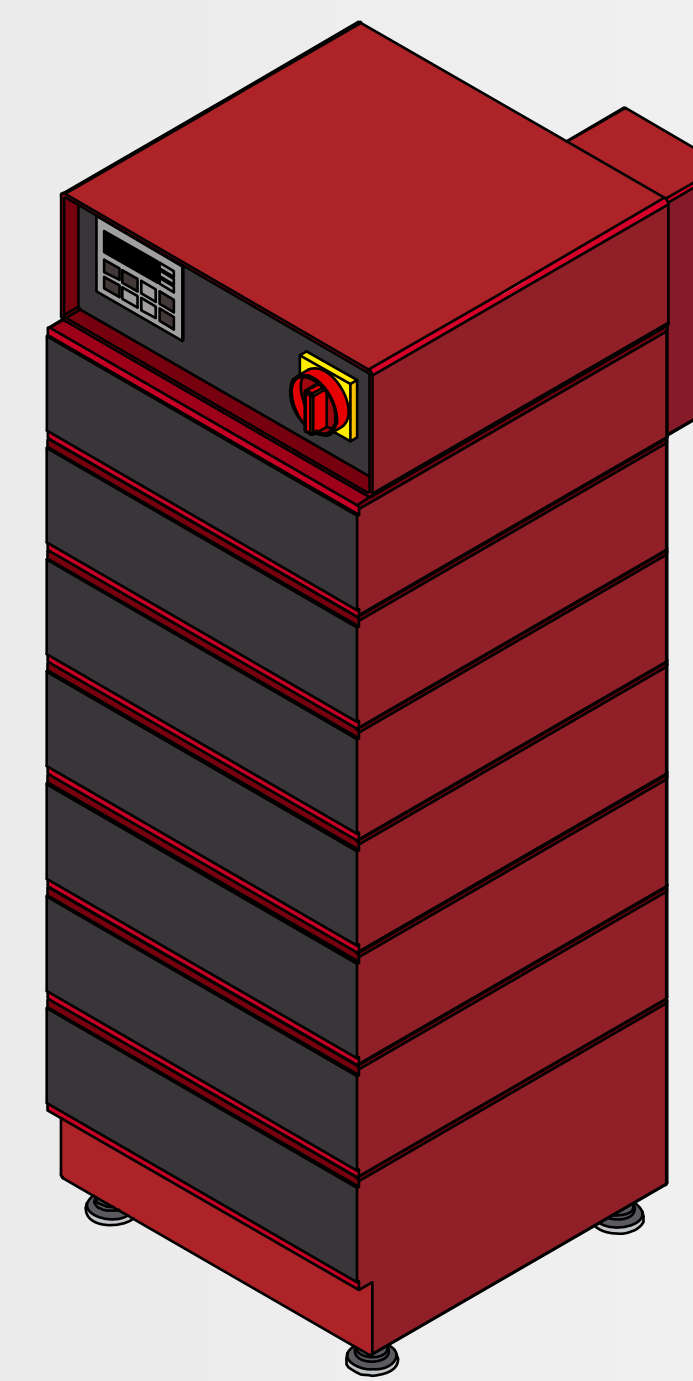


07-1i3i1	
1211 mm	
2800 A	
IP32	
183 kg	

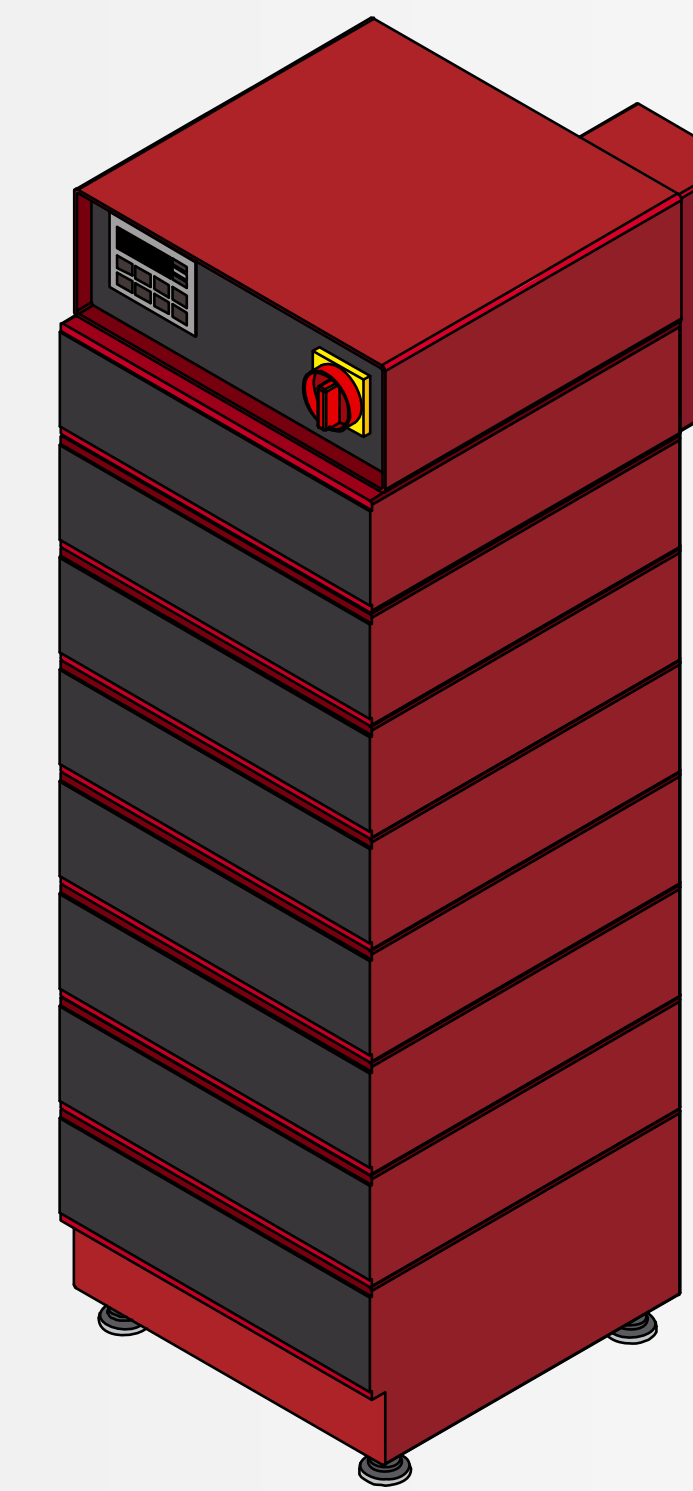


08-2i2i2	
1343 mm	
3300 A	
IP32	
203 kg	

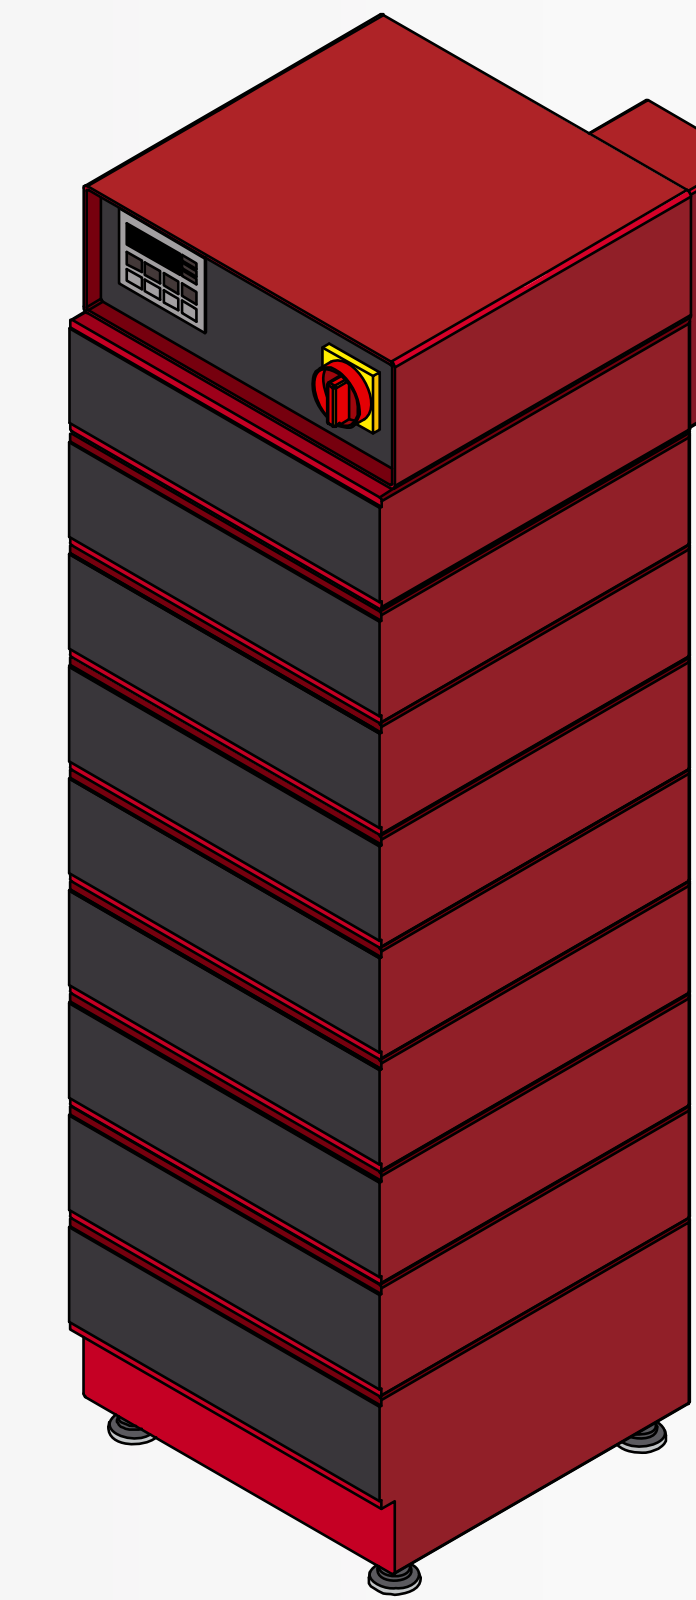

09-2i3i2	
1475 mm	
3900 A	
IP32	
223 kg	

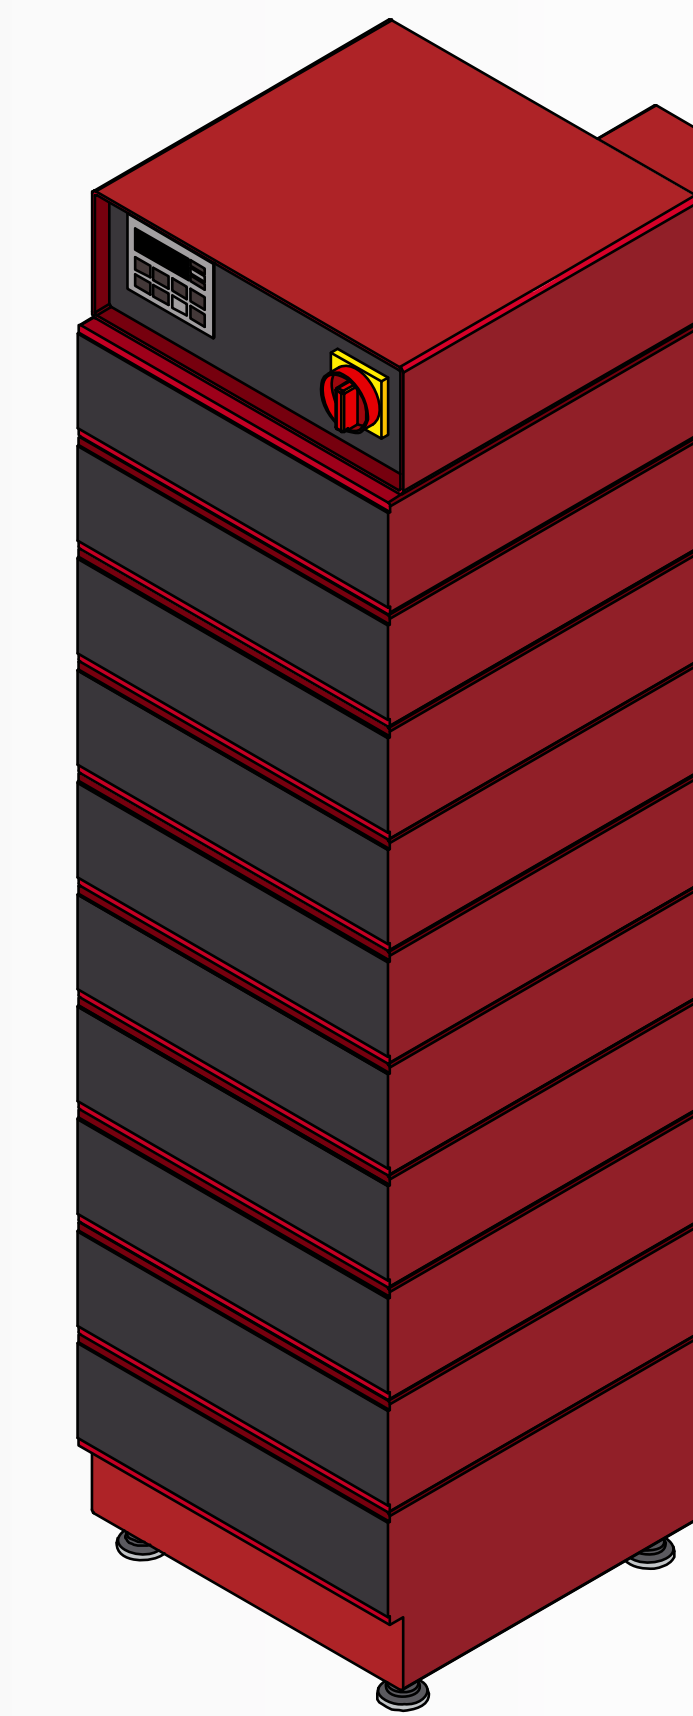

10-2i4i2	
1607 mm	
4400 A	
IP32	
243 kg	

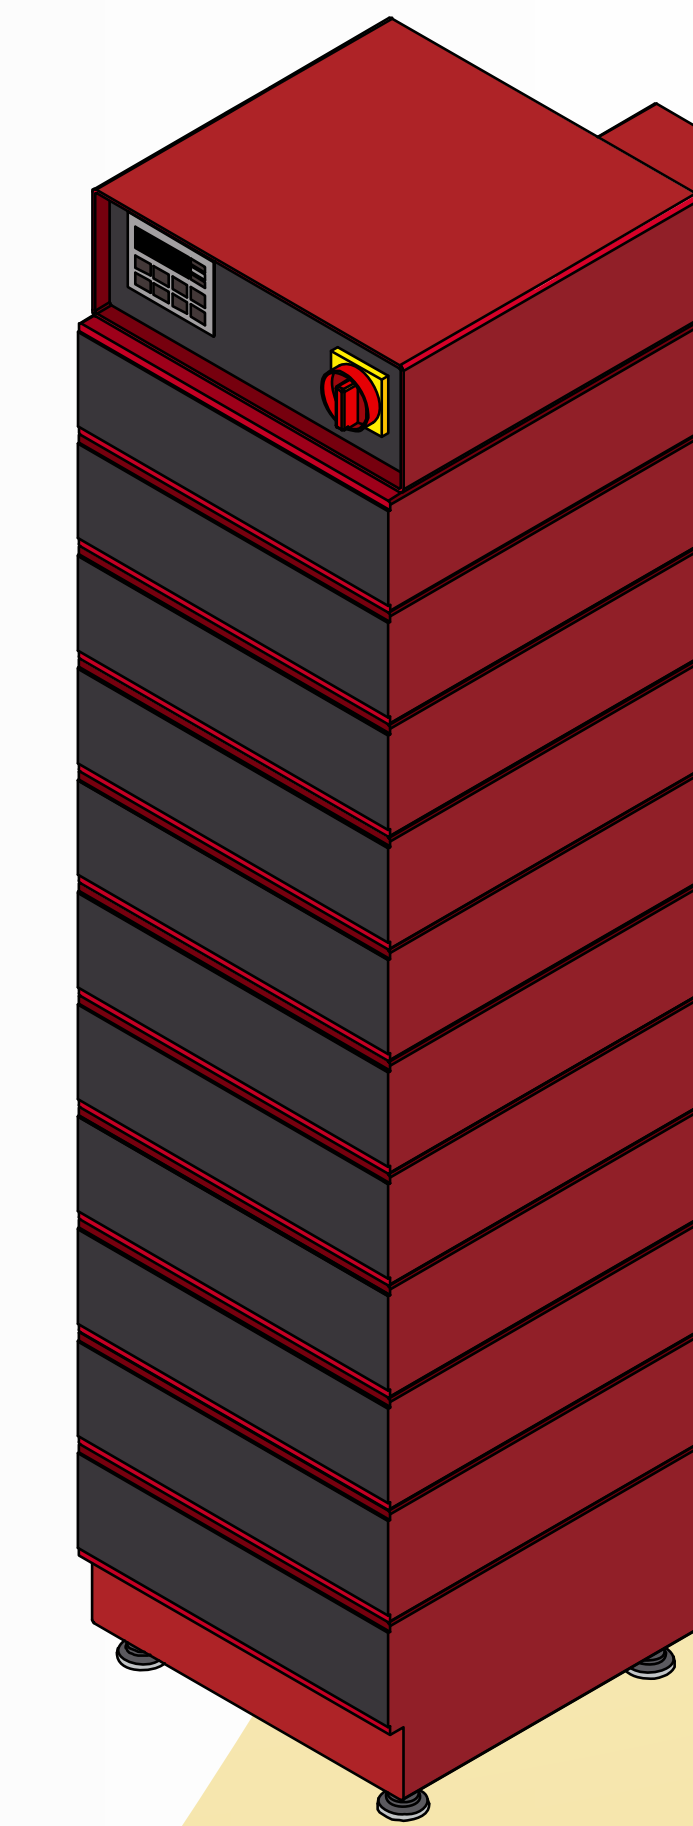

11-3i3i3	
1739 mm	
5000 A	
IP32	
287 kg	