


DC Water Cooled configurations



429 mm
Base
424 mm


Configuration:
Height:
Max. DC Amps:
IP:
Weight:

Q100

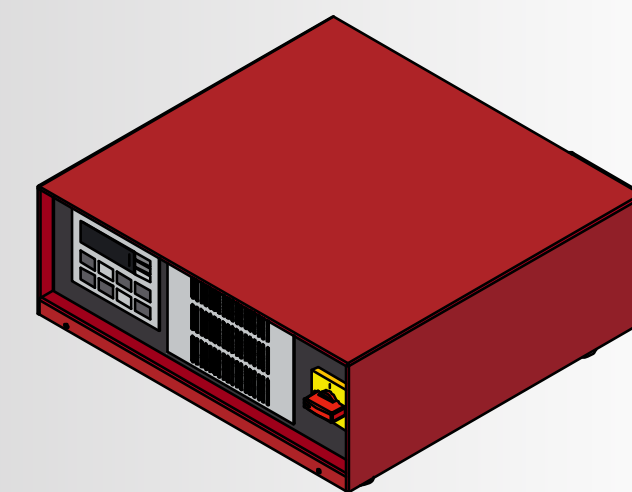

01 (mini)
154 mm
300 A
IP43
25 kg

Q500

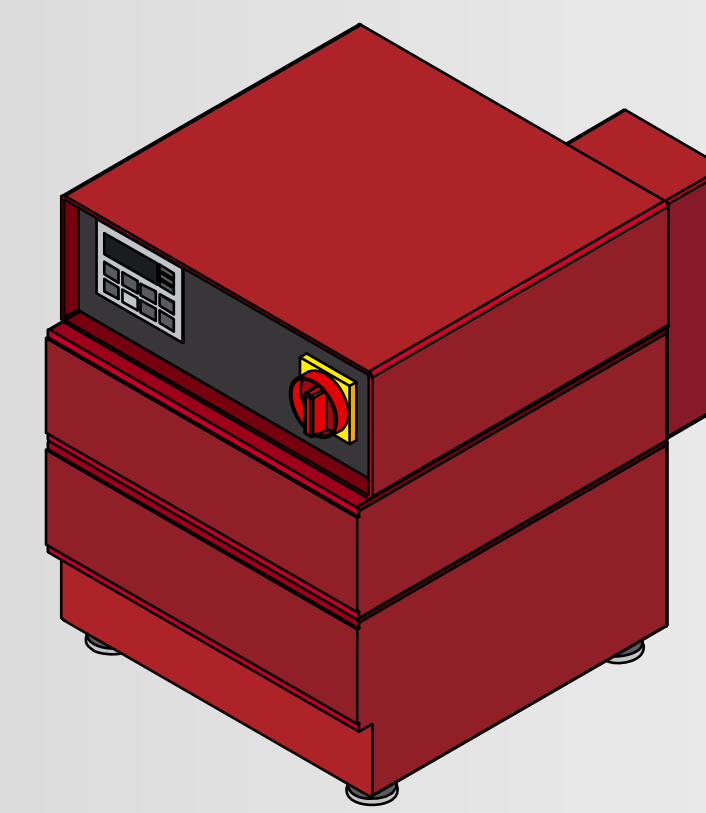

02-i1
551 mm
1000 A
IP43
86 kg



03-1i1
683 mm
2000 A
IP43
110 kg



04-1i2
815 mm
2000 A
IP43
134 kg



05- 1i1i1
947 mm
3000 A
IP43
160 kg

429 mm
Base
424 mm

Configuration:
Height:
Max. DC Amps:
IP:
Weight:

Q500




06-1i2i1
1079 mm
4000 A
IP43
184 kg




07-1i3i1
1211 mm
5000 A
IP43
208 kg



08-2i2i2
1343 mm
6000 A
IP43
232 kg

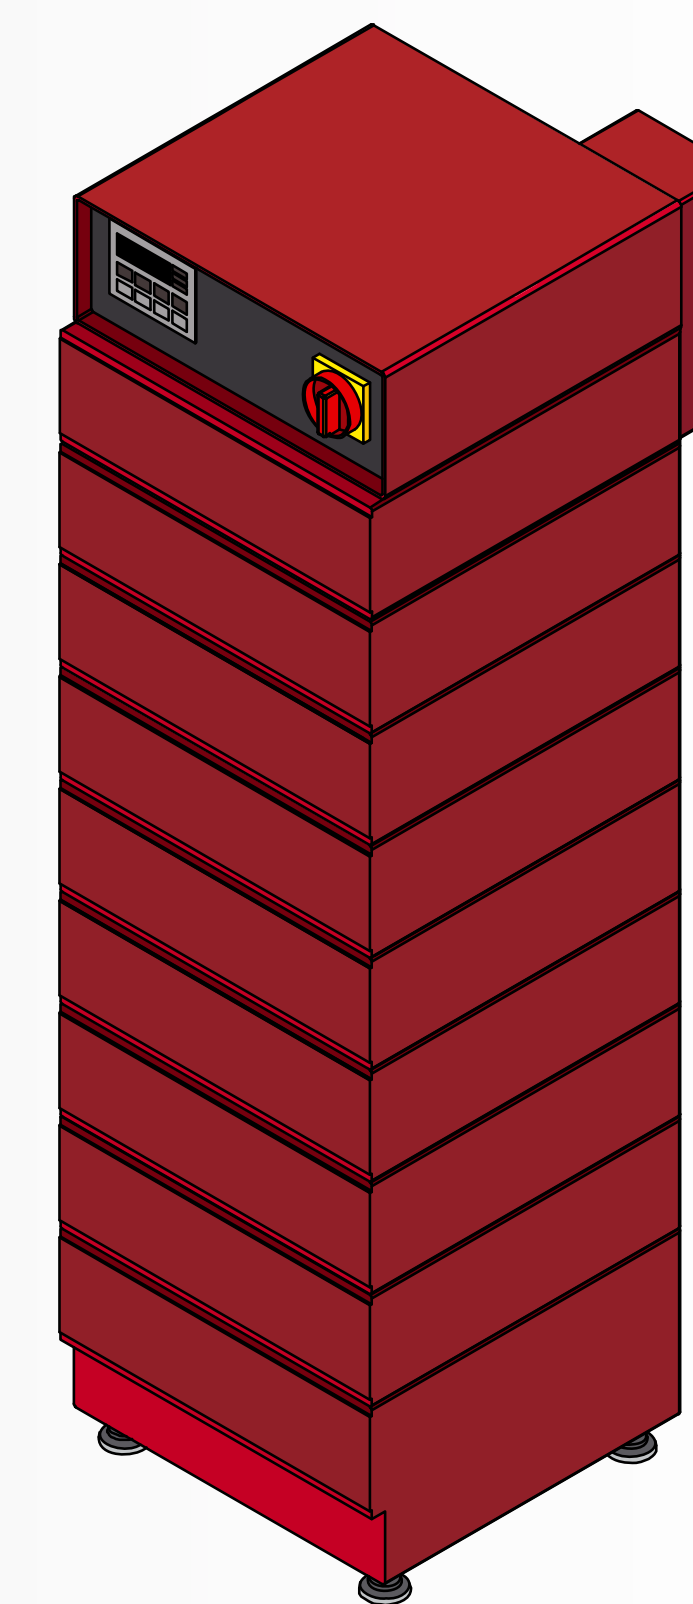

09-2i3i2
1475 mm
7000 A
IP43
256 kg

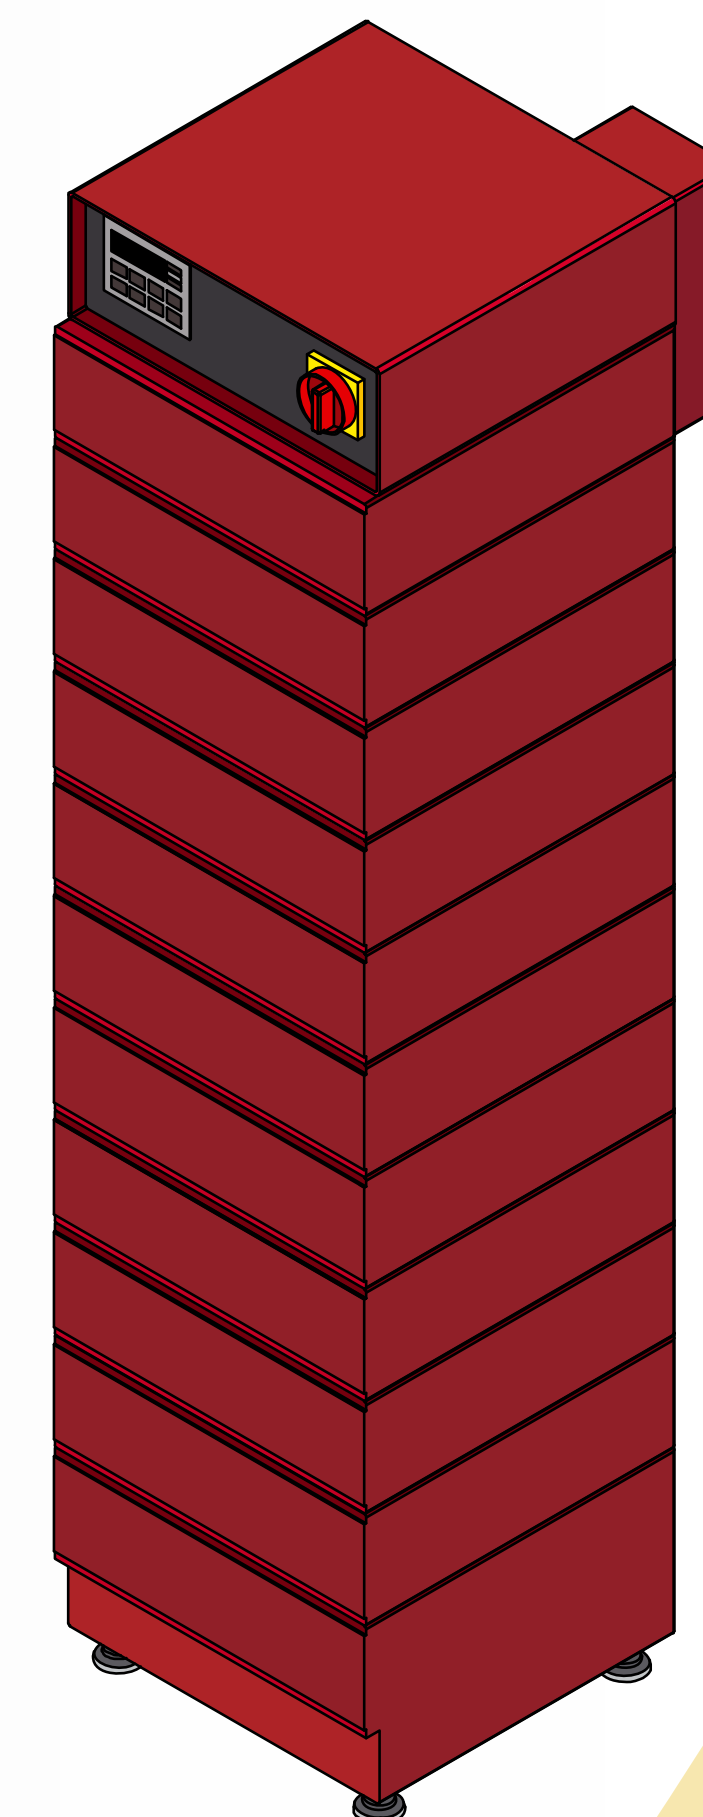

11-2i2i2i2
1739 mm
8000 A
IP43
304 kg